



Product Service

EC-Type Examination Certificate

No. P5 13 04 47571 033

Holder of Certificate: **Kaya Yapi Sanayi Ltd. STI
Gebze Organize Sanay**

Bölgesi 1000. Sokak No:1015
41480 Cayirova Gebze Kocaeli
TURKEY

Product: **PPE against fall from a height
Guided type fall arrester, RfU CNB/P/11.073**


Model(s): **Fall arrester (F-5) including vertical lifeline (K-2020)**

Parameters:	Versions:	Guided Type Fall Arrester including a rigid anchor line: - Ø 8mm fall arrest steel wire rope, type K-2020
	Function principle:	Fall arrest steel wire rope in which the fall arrester blocks spring driven over joint and clamp device
	Fall arrest wire rope:	System with steel wire rope, anchorage plates, rope connector, energy absorber, tension element, fixation elements and fall arrester according to technical specification;
	Steel cable:	LL-100; stainless steel wire rope Ø 8 mm; 7 x 19; min breaking load 16 kN; with steel thimbles; 2 upper eyes with aluminium ferrules; lower eye with 2 screwed rope clamps;
	More Parameters:	see Annex

This EC-Type Examination Certificate is issued according to Article 10 of Council Directive 89/686/EEC for personal protective equipment as classified in Article 8 (PPE of category 3). It confirms that the listed product fulfills the basic requirements as specified in Annex II of the Directive. This certificate refers only to the sample submitted to TÜV SÜD Product Service GmbH for testing and certification and on its technical documentation. See also notes overleaf.

Test report no.: 71384684

Valid until: 2018-04-02



(Volker Kforn)

Date, 2013-04-30



TÜV SÜD Product Service GmbH is Notified Body according to Council Directive 89/686/EEC for personal protective equipment, notified by publication in the Official Journal of the EC No. C 203/44 dated July 07th, 1994 with identification No. 0123.



Product Service

Annex to

EC-Type Examination Certificate No. P5 13 04 47571 033


Fall arrester (F-5) including vertical lifeline (K-2020):

Anchorage plates:	AP-300A; Top anchorage point made of 6 mm stainless steel sheet, welded, with 2 rope attachment points Ø20 mm; 390 mm x 92 mm x 60 mm; 6 slots for ladder fixation; AP-300B; Bottom anchorage point made of 6 mm stainless steel sheet, welded, with 1 rope attachment point Ø 20 mm; 390 mm x 92 mm x 60 mm; 4 slots for ladder fixation;
Tensioner:	FS-40; left/ right screw principle in M 14; stainless steel; rope tension between 0,75 kN and 0,85 kN;
Energy absorber:	FA-50; deformation energy absorber; frame stainless steel; 180 mm x 50 mm x 35 mm; with red indicator screw;
Fall arrester:	F-5; stainless steel clamp with parallelogram lever system, spring-pre-tensioned with 2 clamps; attachment eye with oval connector; fall arrester can only be detached from steel wire rope when connector is dismounted; rope connection with slotted fall arrester body; 77 mm x 135 mm x 19 mm (without connector); inner width of connector 88 mm;
Connector:	type K-2/3ACP (EC Type Examination Certificate P5 13 04 4571 034; EN 362/B:2004); steel carabiner with self closing and self locking gate; Connector is permanently attached with fall arrester over a Ø2 mm steel cable device;
Minimum rated load:	40 kg
Maximum rated load:	100 kg
Minimum Temperature:	- 30 °C
Marking:	- on fall arrester: fitting position with arrow; manufacturer logo; CE-marking; „read instructions“-pictogram; EN 353-1; RfU 11.073; type; "to be used with its original carabiner and Ø 8mm wire rope ONLY"; type of the appropriate rigid anchor line; manufacturing year; serial number; rated load (40-100 kg); - on rigid anchor line: type of the appropriate guided type fall arrester; the maximum number of user; the minimum distance between each user; manufacturer logo; manufacturing year; serial number; EN 353-1; CE-marking; „read instructions“-pictogram; RfU11.073
Weight:	- fall arrester (F-5): 688 grams - system (K-2020, without fall arrester): 7,1 kg



Product Service

F-5 (including connector):

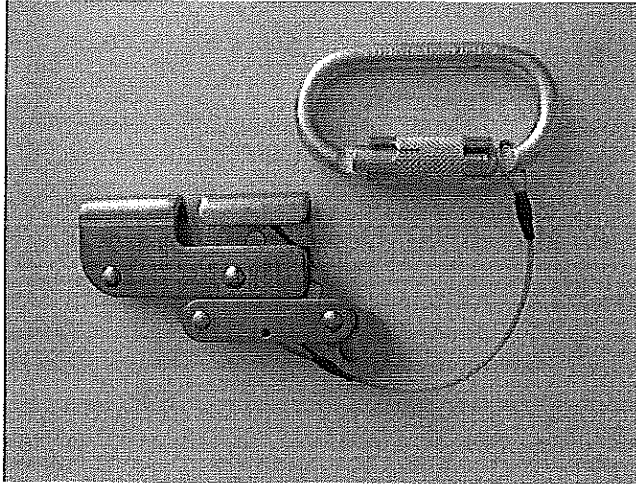

K-2020:



Department: DEMUCMES / vm
Date: 2013-04-30



Product Service


Annex to EC-Type Approval Certificate

No.: P5 09 10 47571 029

K-2020:

- Tensioner: FS-40; left/ right screw principle in M 14; stainless steel;
Cable tension between 0,75 kN and 0,85 kN;
- Energy absorber: FA-50; deformation energy absorber; frame stainless steel;
180 mm x 50 mm x 35 mm; with red indicator screw;
- Fall arrester: F-5; stainless steel clamp with parallelogram lever system,
spring-pre-tensioned with 2 clamps; attachment eye with
oval connector KAYA K-1 (EN 362-B/ EN 12275-B);
fall arrester can only be detached from cable when
connector is dismantled; cable connection with slotted fall
arrester body; 77 mm x 135 mm x 19 mm (without
connector); inner width of connector 88 mm;
- Connector: type H-127-L; swivel connector with twist-lock gate locking
device;
- Marking: -on fall arrester: fitting position with arrow; manufacturer
logo; CE-marking; „read instructions“-pictogram; EN 353-1;
type; “to be used with wire rope 8 mm dia. only”; “To be use
with the original Karabiner only”
-on cable: acceptable types;

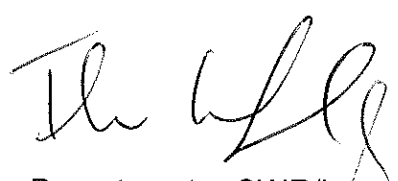


 Department: SWR/kp
 Date: 2009-10-21